DCT26 Deluge Valve





DCT26 Deluge Valves are designed for deluge fire protection systems, providing rapid water discharge through open nozzles or sprinklers during fire emergencies. They ensure fast system activation and reliable protection in high-risk areas such as industrial plants, storage facilities, and power stations.

Constructed from durable, corrosion-resistant materials, DCT26 valves deliver long service life, dependable performance, and minimal maintenance. Easy to install and operate, they are ideal for applications requiring quick-response fire suppression and maximum system reliability.

Areas of Application

Water and wastewater systems
Chemical industry
Food and beverage industry
Pharmaceutical production
Oil and gas pipelines
HVAC systems

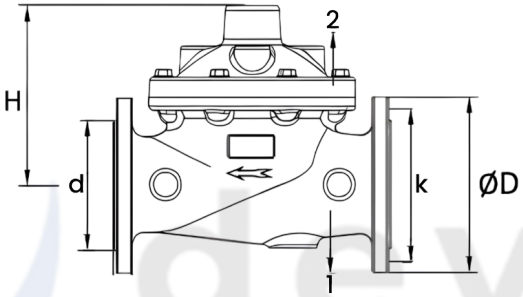



Material Specifications

Nu	Part Name	Material
1	Body	EN-GJS-400-15 (GGG40)
2	Bonnet	EN-GJS-400-15 (GGG40)

Dimensions

DN	PN	D	k	d	R	n-d	L	H	Weight
40	10-16	150	110	84	175	19x4	240	185	18
50	10-16	165	125	99	175	19x4	240	185	18
65	10-16	185	145	118	200	19x4	280	200	22
80	10-16	200	160	132	220	19x8	310	220	26
100	10-16	220	180	156	260	19x8	345	240	35
150	10-16	285	240	211	360	23x8	480	330	60
200	10	340	295	266	400	23x8	560	385	80
	16	340	295	266	400	23x12	560	385	80